

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**





INTELLECTUAL  
PROPERTY INDIA

GOVERNMENT OF INDIA  
MINISTRY OF COMMERCE & INDUSTRY,  
PATENT OFFICE, DELHI BRANCH,  
W.- 5, WEST PATEL NAGAR,  
NEW DELHI - 110 008.

*I, the undersigned, being an officer duly authorized in accordance with the provision of the Patent Act, 1970 hereby certify that annexed hereto is the true copy of the **Application, Complete Specification and Drawing Sheets** filed in connection with Application for Patent No.958/Del/02 dated 20<sup>TH</sup> September 2002.*

*Witness my hand this 29<sup>th</sup> Day of August 2003.*



(S.K. PANGASA)

Assistant Controller of Patents & Designs



0958-2

FORM 1

THE PATENTS ACT, 1970

(39 of 1970)

APPLICATION FOR GRANT OF A PATENT

(See Sections 5(2), 7, 54 and 135)

20 SEP 2002 5000  
3073  
Registrar of Patents

1. I/we,

*STMicroelectronics Pvt. Ltd., an Indian company, of Plot No. 16A, Sector 16A, Institutional Area, Noida - 201 3001, Uttar Pradesh, India.*

2. hereby declare -

(a) that I am/we re in possession of an invention titled "**Method And Apparatus Of Reloading Erroneous Configuration Data Frames During Configuration Of Plds.**"

(b) that the ~~provisional~~/ complete specification relating to this invention is filed with this application

(c) that there is no lawful ground of objection to the grant of a patent to me/us.

3. further declare that the inventor(s) for the said inventions is/are

(i) *GOEL Ashish Kumar, an Indian citizen, of S 1/8 A-1, Gilat Bazar, Varanasi - 221 002, Uttar Pradesh, India.*

(ii) *KHANNA Namerita, an Indian citizen, of 228A, DDA MIG Flats, Rajauri Garden, New Delhi - 110 027, India.*

(iii) *AGGARWAL Davinder, an Indian citizen, of B3A/287 Janak Puri, New Delhi - 110 058, India.*

4. I/we claim the priority from the application(s) filed in convection countries, particulars of which are as follows: NA

5. I/we state that the said invention is an improvement in or modification of the invention the particulars of which are as follows and of which I/we are the applicant/patentee: NIL

6. I/we state that the application is divided out of my/our application. the particulars of which are given below and pray that this application be deemed to have been filed on \_\_\_\_\_ under section 16 of the Act. NIL.

7. That I am/we are the assignee or legal representative of the true and first inventors.

8. That my/our address for service in India is as follows:

*ANAND & ANAND, Advocates  
B-41, Nizamuddin East  
New Delhi - 110 013*

ORIGINAL

*Tel Nos.: (11) 4355078, 4355076, 4350360*

*Fax Nos.: (11) 4354243, 4352060*

9. Following declaration was given by the inventor(s) ~~or applicant(s) in the convention country:~~

I/we are the true and first inventors for this invention ~~or are and the applicant(s) in the convention country~~ declare that the applicant(s) herein is/are my/our assignee or legal representative

---

*GOEL Ashish Kumar*

---

*KHANNA Namerita*

---

*AGGARWAL Davinder*

*Date: 20<sup>th</sup> September, 2002*

10. that to the best of my/our knowledge, information and belief the fact and matters stated herein are correct and that there is no lawful ground of objection to the grant of patent to me/us on this application.
11. Followings are the attachment with the application:
- (a) ~~provisional~~/ complete specification (3 copies)
  - (b) Form 1 (in triplicate)
  - (c) Formal Drawings (3 copies)
  - (d) Statement and Undertaking on Form 3
  - (e) Fee Rs. 5000.00 In cash/cheque/bank draft bearing no. , dated 18<sup>th</sup> September, 2002 on Citibank Bank.

I/we request that a patent may be granted to me/us for the said invention.

Dated this 20<sup>th</sup> day of September, 2002



---

*of Anand And Arund Advocates  
Attorney for the Applicant*

To  
The Controller of Patents  
The Patent Office, Delhi

0958-2

20 SEP 2002

THE PATENTS ACT, 1970

COMPLETE SPECIFICATION

Section 10

*"Method And Apparatus Of Reloading Erroneous Configuration Data  
Frames During Configuration Of Plds."*

*STMicroelectronics Pvt. Ltd., an Indian company, of Plot no. 2 & 3,  
Sector 16A, Institutional Area, Noida – 201 301, Uttar Pradesh, India.*

The following specification particularly describes and ascertains the nature of this invention and the manner in which it is to be performed:

## **METHOD AND APPARATUS OF RELOADING ERRONEOUS COFIGURATION DATA FRAMES DURING CONFIGURATION OF PLDs**

### **Field of Invention**

The present invention relates to programmable devices such as Programmable Logic devices (PLDs). More particularly, it relates to configuration of Programmable Logic devices (PLDs) and provides a method and apparatus to reload only erroneous data frames during PLD configuration.

### **Background of the Invention**

PLDs are widely used for implementing digital logic. Each PLD has to be configured for the desired circuit prior to use. For this purpose the PLD incorporates a configuration memory that defines its functional behaviour based on data stored in it. FPGAs are the most widely used PLD devices. A typical FPGA includes a matrix of logic blocks, routing resources and I/O blocks. In addition to this it also includes configuration memory cells and configuration control logic. Values stored in the memory cell control the operation of FPGA i.e., functionality of FPGA is defined by the values stored in FPGA memory cells. Bits are loaded in the configuration cells through a configuration logic that is provided by configuration devices.

**Figure 1** defines a conventional FPGA configuration process flow as described in ALTERA's application note 116 "Configuring APEX20K, FLEX10K, FLEX6K devices, ALTERA's application note 33 "Configuring FLEX8K devices", Virtex's application note XAPP138 "FPGA Series Configuration and Readback" and Xiinx.Inc.'s "The programmable Logic databook 1999". The FPGA is first brought into the configuration mode 100, following which the configuration memory is cleared 102. The configuration memory is cleared by storing 0's or 1's in all the cells of the memory. In case of partial configuration, configuration memory is not cleared and step 102 is bypassed. In step 104, configuration data is loaded frame by frame. After each frame is loaded, an error detection circuit checks the frame for any error 106. There are several methods for checking the frame for errors such as parity check, CRC check etc., but the most popular method is a CRC check. If no error is detected in the frame, then the process moves onto step 108 to check whether the end of configuration process has been reached or not. If it is configuration process is not over, i.e., more frames



are still to be loaded, the process flow reverts to step 104 and the next frame is loaded. Subsequently steps 106 and 108 are followed again till the end of configuration of the FPGA. When the end of configuration is reached, the FPGA device comes back to the start up mode as shown in step 110. After the device is configured it can start its normal operation.

If any error is detected in the data frame at step 106, it causes STATUS signal to be set into the 'High' state, indicating an error in the data frame. The configuration is stopped and the process restarts all over again from step 100 and all the frames are reloaded again. This method of configuration of a FPGA device is inefficient because even if an error occurs in the last frame to be loaded to the device, all the frames are successfully loaded prior to that frame have to be loaded again leading to wastage of time.

Therefore, it would be advantageous to have an improved method and apparatus for configuration of a FPGA device wherein, only the erroneous frame is required to be reloaded rather than reloading all frames again in case of an error.

#### **Object and summary of the invention**

The object of this invention is to obviate the above drawbacks in the prior art and provide an improved method and apparatus to reload only an erroneous frame during FPGA configuration rather than reloading all frames in case of an error in a particular frame.

To achieve this and other objects, The invention provides an improved method and apparatus for reloading only those frames in which errors are detected during the FPGA configuration. A configuration data frame for a FPGA is simultaneously loaded to the Frame register of the FPGA and also to an error detection circuit which detects errors with the loaded frame. An error count is maintained by the apparatus and is incremented each time an error is detected. The incremented value is compared with a pre-determined threshold value 'n' by a Comparator circuit. If a match is found then the configuration process is aborted, else the data frame is reloaded in the configuration memory, transferred again to the frame register and rechecked for errors. If no error is detected with the reloaded frame, the error count is reset and the next frame is loaded until the FPGA configuration process is over. Only error free configuration data frames are loaded into the FPGA memory.

**Brief description of accompanying drawings**

The objects and advantages of the invention will become more apparent in reference to the following description and accompanying drawings, wherein:

**Figure 1** shows the conventional configuration process of a FPGA device as used in the prior art.

**Figure 2** shows a configuration logic element of a conventional FPGA.

**Figure 3** shows an arrangement of configuration latches in a conventional FPGA.

**Figure 4** shows a conventional interface of FPGA with an external controller and memory device when working in SLAVE mode.

**Figure 5** shows a conventional interface of FPGA with a memory device when working in MASTER mode.

**Figure 6** shows an improved configuration process of a FPGA device as provided by the present invention.

**Figure 7** shows an improved control logic within the FPGA to implement the present invention.

**Detailed description**

A typical FPGA device can be configured in various modes out of which the most common is a Slave and Master mode. In Master mode, FPGA controls its configuration operation. The clock signal and memory addresses are provided by the FPGA itself to the configuration device or PROM. On the other hand when the FPGA works in slave mode, an external controller or Master FPGA controls its configuration process. The external controller or master FPGA controls the configuration operation by providing the clock and memory addresses.

**Figure 1** which shows the prior art configuration process has already been described in the 'Brief description of the prior art' section.

**Figure 2** shows a configuration memory element **200** used in a conventional FPGA device. The memory element has a write enable signal **WE 204** that is used to control the storage of data in the memory element. To enable storing of data in the memory element, the state of the **WE signal 204** is set to 'high', following which the data available at input **DATAIN 202** is latched in the memory element. Once the data has been stored, the **WE signal 204** reverts back to a 'low' state. The **WE signal 204** may also be controlled by a logic wherein it allows data to be latched when in the 'low' state while remaining in the 'high' state otherwise.

**Figure 3** shows arrangement of configuration memory latches (as described in figure 2) in a conventional FPGA. These elements are arranged in the array of rows and columns. All latches in a particular row share the same data line while all latches in a particular column share a common write enable signal line. Write enable signals are generated by a horizontal register **300** and data signals are the output of the **FRAME register 302**.

**Frame register 302** is a shift register. Data input to the frame register **302** is through **DIN**. At the start of the configuration process, data is loaded in the frame register. At this time all write-enable signals **310/1, 310/2... 310/m** to the latch columns are disabled. After one complete frame is loaded in the frame register, one of the write enable signals say **310/1** gets enabled and configuration data is loaded in the first column through the data lines **320/1, 320/2...320/n**. Following this, new data frame is loaded in the frame register and now the write-enable signal for the next column of memory latches **310/2** gets enabled and data is loaded in the latches from the frame register through the data lines **320/1, 320/2...320/n**. This process goes until all latches have been loaded with the configuration data.

**Figure 4** shows a conventional interface of **FPGA 400** with an external controller **402** and memory device **404** when working in SLAVE mode. In slave mode, the controller **402** provides address to the memory device **404** and clock signal to **FPGA 400**. A pulse on **PROGRAM** pin of the **FPGA 400** initiates the configuration process. **CONF\_DONE** indicates the completion of the configuration process. During the configuration, it remains in a 'low' state and after completion of configuration it goes to a 'high' state indicating end of configuration. The state transition may be vice-versa also depending on the logic followed by the circuit. A **STATUS** pin is used to indicate permanent error in configuration. If the **STATUS** pin has a 'high' pulse the configuration process is aborted. As in case of

CONF\_DONE pin, the STATUS pin can be set to abort the configuration when it receives a 'low' signal.

A pulse on RELOAD indicates that some error has been detected in the frame and causes the controller 402 to decrement address by one frame so that the erroneous frame can be reloaded. Clock signal is provided to the FPGA 400 by the controller through CONF\_CLK input pin. Data to FPGA 400 comes from memory device 404 and connected with data pins DIN.

There can be n number of data pins depending on the FPGA. Figure 4, used only for illustrative purposes, depicts a FPGA that can accept data in one byte at a time therefore, it has 8 data input pins DIN<0:7>. But a FPGA 400 that accepts data in serial mode, will have only one pin and memory device 404 used would be of X1 type.

Memory device 404 can also be within the controller. In both the embodiments, address to the memory device 404 is provided by controller 402.

**Figure 5** shows a conventional interface of a FPGA 500 with a memory device 502 when working in MASTER mode. In master mode, FPGA 500 controls its own configuration operation. The addresses and clock signal (in case of synchronous memory) to the memory 502 are provided by the FPGA 500 itself. CONF\_DONE pin of the FPGA 500 indicates whether the configuration is in progress or not. The CONF\_DONE pin is connected with the chip enable signal (CE) of the memory device 502. When the configuration process is initiated, the CONF\_DONE signal enables the memory device 502 and disables it at the end of the process. STATUS pin indicates that a permanent error has been detected during configuration. This pin is connected to output enable (OE) of the memory device 502. Since address to memory device 502 is provided by the FPGA 500, thus RELOAD signal is not connected outside the FPGA 500. Data and addresses are exchanged between the FPGA 500 and the memory 502 through the DATA and ADD lines.

**Figure 6** shows configuration process a FPGA device as provided by the present invention. The process starts with the FPGA coming into configuration mode 600, following which the configuration memory is cleared 602. If only a partial configuration is to be done, then the memory is not cleared. After the memory is cleared, the frames are loaded in the memory one

at a time and the loaded frame is transferred to the frame register of the FPGA step 604. This configuration data simultaneously goes to an error detection circuit. Once the complete frame is loaded in the frame register but before it is loaded to the memory latches of the FPGA, it is checked for errors by the error detection circuit 606. If no error is detected at step 608, then the configuration process goes onto step 620 where it is checked whether configuration is over or not. If configuration is not over, then the process flow returns back to step 604 where the next frame is loaded and transferred to the frame register. This process goes on until configuration of the FPGA is completed.

In case an error is detected at step 608, the process flow is transferred to step 610, where a comparator in the error checking circuit compares the error counter value with a pre-determined threshold value 'n'. If error counter value is less than the threshold, then at step 612 the previous frame is reloaded again in the memory, reloaded frame is transferred to the frame register and the error counter is incremented by one. After the complete frame is reloaded in the frame register, it is again checked for errors 614. If the error persists, then a RELOAD signal is generated and process flow returns to step 610. This process continues until the error counter value exceeds the pre-determined threshold or the error does not persist when checked at step 614. If error counter value exceeds the pre-determined threshold then the configuration process is aborted indicating permanent error 618. Otherwise, in case no error is detected in the reloaded frame at step 614, the error counter is reset 616 and the process flow is redirected to step 620 where end of configuration is checked. If configuration is over, then start-up sequence starts 622 and the FPGA begins with its normal operation, otherwise the next frame is loaded 604.

Figure 7 shows the block diagram of the controller circuit which is used in the present invention. It contains an error detection circuit 700 which is used to detect errors in the frame. The error detection circuit can implement various error detection algorithms such as parity check, CRC check etc. An Error counter 706 is provided to maintain a counter indicating the number of times an error has been detected in the loaded frame. A Comparator circuit 708 is used to compare the error counter value to the pre-determined threshold value 'n'. Abort configuration circuit 710 aborts the configuration if the error counter value matches with the pre-determined threshold value 'n'. An Address counter 702 provides addresses to the memory when the FPGA works in Master mode operation but in Slave mode this circuit remains idle because in that case addresses are provided by an external controller or master

FPGA. Controller circuit **704** is used to RESET the error counter value. The functioning of circuit is as follows:

Data from the memory device is loaded in the frame register of the FPGA and simultaneously transferred to the Error detection circuit **700**. Once the complete frame is loaded in frame register, a configuration state machine (not shown) generates a FRAMECLK signal used to check the frame for errors. CTRLCLK, another signal generated by the state machine, goes to the Controller circuit **704** and is used by it to sample the RELOAD signal. The ADDCLK signal also generated by the configuration state machine (in case of master mode) goes to the Address counter **702** and is used to increment the address in the memory so that the next frame can be loaded.

If an error is detected in a frame during the configuration process, a RELOAD signal is activated. This signal goes to Address counter **702**, Error counter **706** and Controller circuit **704**. The Error counter **706** increments the error counter value on detection of RELOAD signal, while the Address counter **702** decrements its value by one frame in case the FPGA is working in the Master mode and RELOAD pad **712** is not connected. If the FPGA is working in the slave mode, the RELOAD pad **712** causes an external Controller device or Master FPGA to decrement its address counter by one frame. Both these steps cause the frame to be reloaded in the configuration memory and the reloaded frame to be transferred to the frame register again. Once the frame is reloaded in the frame register and no error is detected in the frame, the Controller **704** generates the RESET signal to reset the error counter value. If the error is encountered again in the reloaded frame, the error counter value is incremented each time and compared by the Comparator **708** to check whether the error counter value has become equal to a pre-determined threshold value 'n'. When the values become equal, the Abort Config circuit **710** activates the STATUS signal causing the configuration to abort.

Hence, using this apparatus only an erroneous frame is required to be reloaded again in case of error during the configuration process eliminating the need to abort the configuration process on each error and reload all the frames all over again and thus saving a lot of configuration time and effort. Configuration process is not allowed to enter into an infinite loop in case errors persist through the use of the pre-determined threshold.

The description of the present invention has been presented for purposes of illustration and is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art.

The invention has been described as practiced for a FPGA device configuration as the preferred embodiment. However, the invention can be practiced in relation to any Programmable Logic Device (PLD) wherein, configuration data frames are used to configure the device.

**We claim:**

1. An improved method for detecting errors in configuration data frames loaded into the frame register of a Programmable Logic Device (PLD) and reloading only erroneous configuration data frames comprising the steps of:
  - clearing the frame register of the configuration memory of the PLD,
  - loading a new configuration data frame into the frame register and to an error detection circuit,
  - checking said data frame for errors and transferring the data in the frame register to memory latches of the PLD if no error is detected,
  - reloading the frame register of the PLD and incrementing the error counter if errors are encountered, and
  - repeating above steps until the PLD configuration process is completed.
2. The method as claimed in claim 1, further comprising the step of aborting the PLD configuration process if the error counter value equals the pre-determined threshold value.
3. The method as claimed in claim 1, wherein the error detection is performed using error detection algorithms including Cyclic Redundancy check and parity check.
4. The method as claimed in claim 1, wherein the error counter value is reset before loading a new configuration data frame in the frame register.
5. The method as claimed in claim 1, wherein reloading of the frame is achieved by adjusting an address counter when the PLD operates as a Master.
6. The method as claimed in claim 1, wherein reloading of the frame is achieved by signaling an external controller to adjust an address counter when the PLD operates as a Slave.




7. An improved Programmable Logic Device (PLD) incorporating a circuit arrangement for detecting errors in configuration data frames loaded into its frame register and reloading only erroneous configuration data frames, comprising:
  - error detecting means for checking the configuration data loaded in the frame register,
  - error counting means for incrementing an error count for each error detected in said configuration data frame,
  - comparing means for comparing the error count to a pre-determined threshold value, and
  - reloading means for reloading a configuration data frame into the frame register if errors are encountered.
8. The improved PLD as claimed in claim 7, further comprising means for aborting the PLD configuration process in case the error counter value equals the pre-determined threshold value.
9. The improved PLD as claimed in claim 7, wherein the error detecting means implement error detection algorithm including Cyclic Redundancy check and parity check.
10. The improved PLD as claimed in claim 7, wherein a controller is provided to reset the error count before loading a new configuration data frame in the frame register.
11. The improved PLD as claimed in claim 7, wherein the reloading means is an address counter to enable reloading of the erroneous frame into the frame register in case of errors when the PLD operates as a Master.
12. The improved PLD as claimed in claim 7, wherein the reloading means are connected to an external controller to enable reloading of the erroneous frame into the frame register in case of errors when the PLD operates as a Slave.
13. An improved method for detecting errors in configuration data frames loaded into the frame register of a Programmable Logic Device (PLD) and reloading only erroneous

configuration data frames substantially as herein described with reference to and as illustrated in figures 6 & 7 of the accompanying drawings.

14. An improved Programmable Logic Device (PLD) incorporating a circuit arrangement for detecting errors in configuration data frames loaded into its frame register and reloading only erroneous configuration data frames substantially as herein described with reference to and as illustrated in figures 6 & 7 of the accompanying drawings.

Dated this 20<sup>th</sup> day of September, 2002

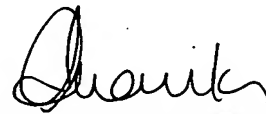

---

of ANAND & ANAND, Advocates  
Agents for the Applicants

## **METHOD AND APPARATUS OF RELOADING ERRONEOUS COFIGURATION DATA FRAMES DURING CONFIGURATION OF PLDs**

### **ABSTARCT OF THE INVENTION**

The invention provides an improved method and apparatus for reloading only those frames in which errors are detected during the FPGA configuration. A configuration data frame for a FPGA is sumultaneously loaded to the Frame register of the FPGA and also to an error detection circuit which detects errors with the loaded frame. An error counter value is maintained by the apparatus and is incremented each time an error with a frame is detected. The incremented value is compared by a Comparator circuit with a pre-determined threshold value 'n'. If a match is found then the configuration process is aborted, else the data frame is reloaded in the configuration memory, transferred again to the frame register and recheked for errors. If no error os detected with the reloaded frame, the error counter value is reset and the next frame is loaded until the FPGA configuration process is over.

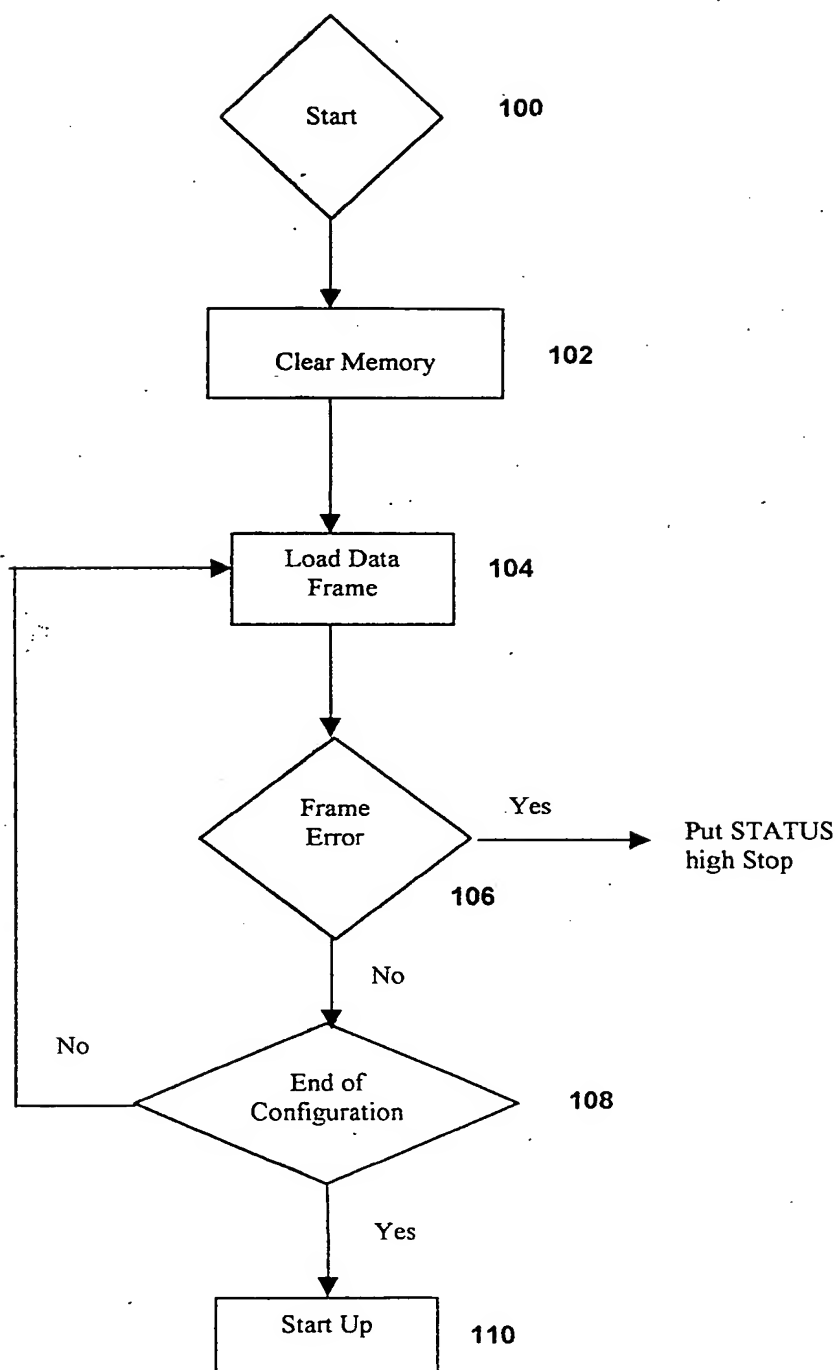


Figure 1

*Chauhan*  
Of Anand and Anand Advocates  
Attorney for the Applicant

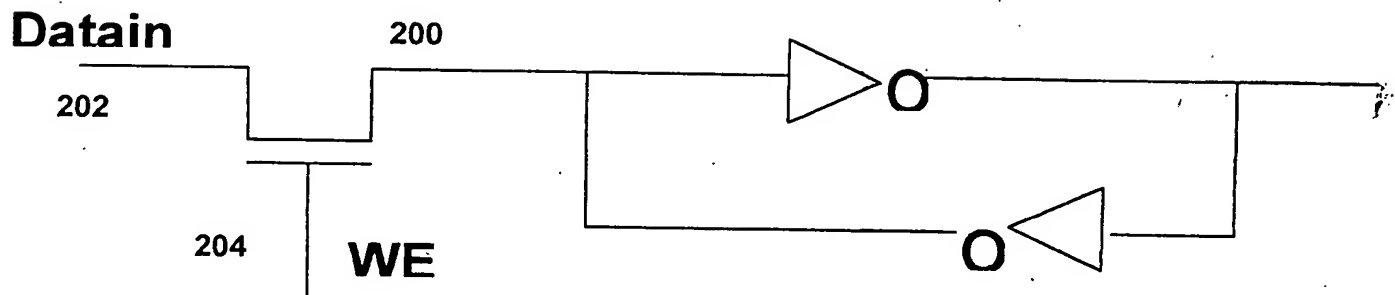


Figure 2

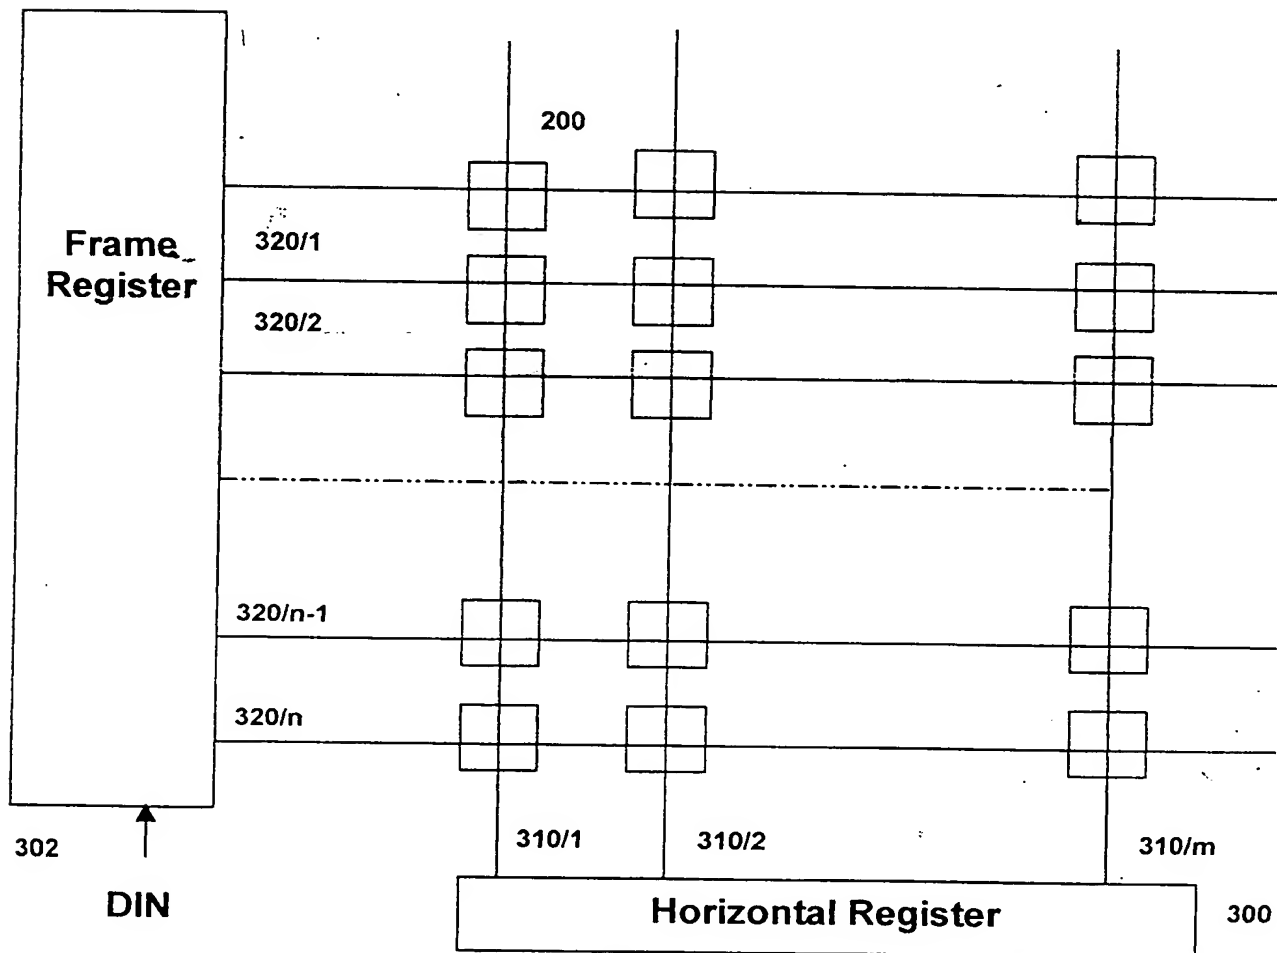


Figure 3

*Anand*  
Of Anand And Anand Advocates  
Attorney for the Applicant

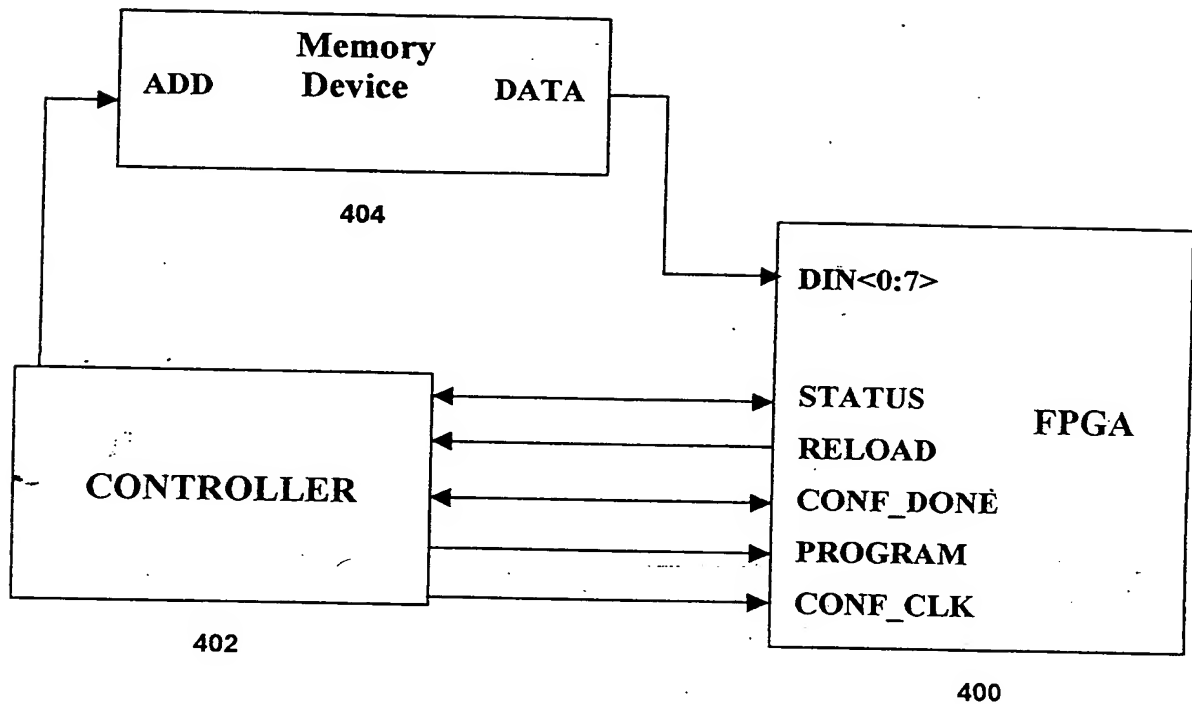


Figure 4

*Chander*

*Of Anand And Anand Advocates  
Attorney for the Applicant*

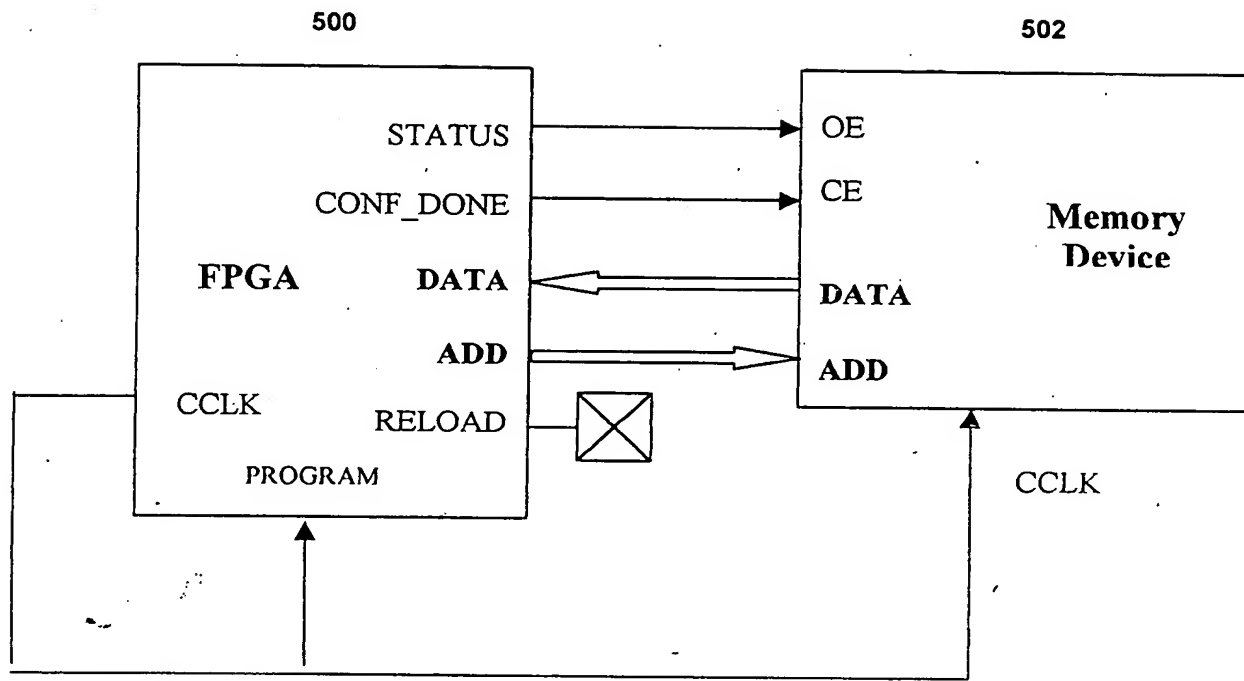


Figure 5

*Chauhan*  
Of Anand and Anand Advocates  
Attorney for the Applicant

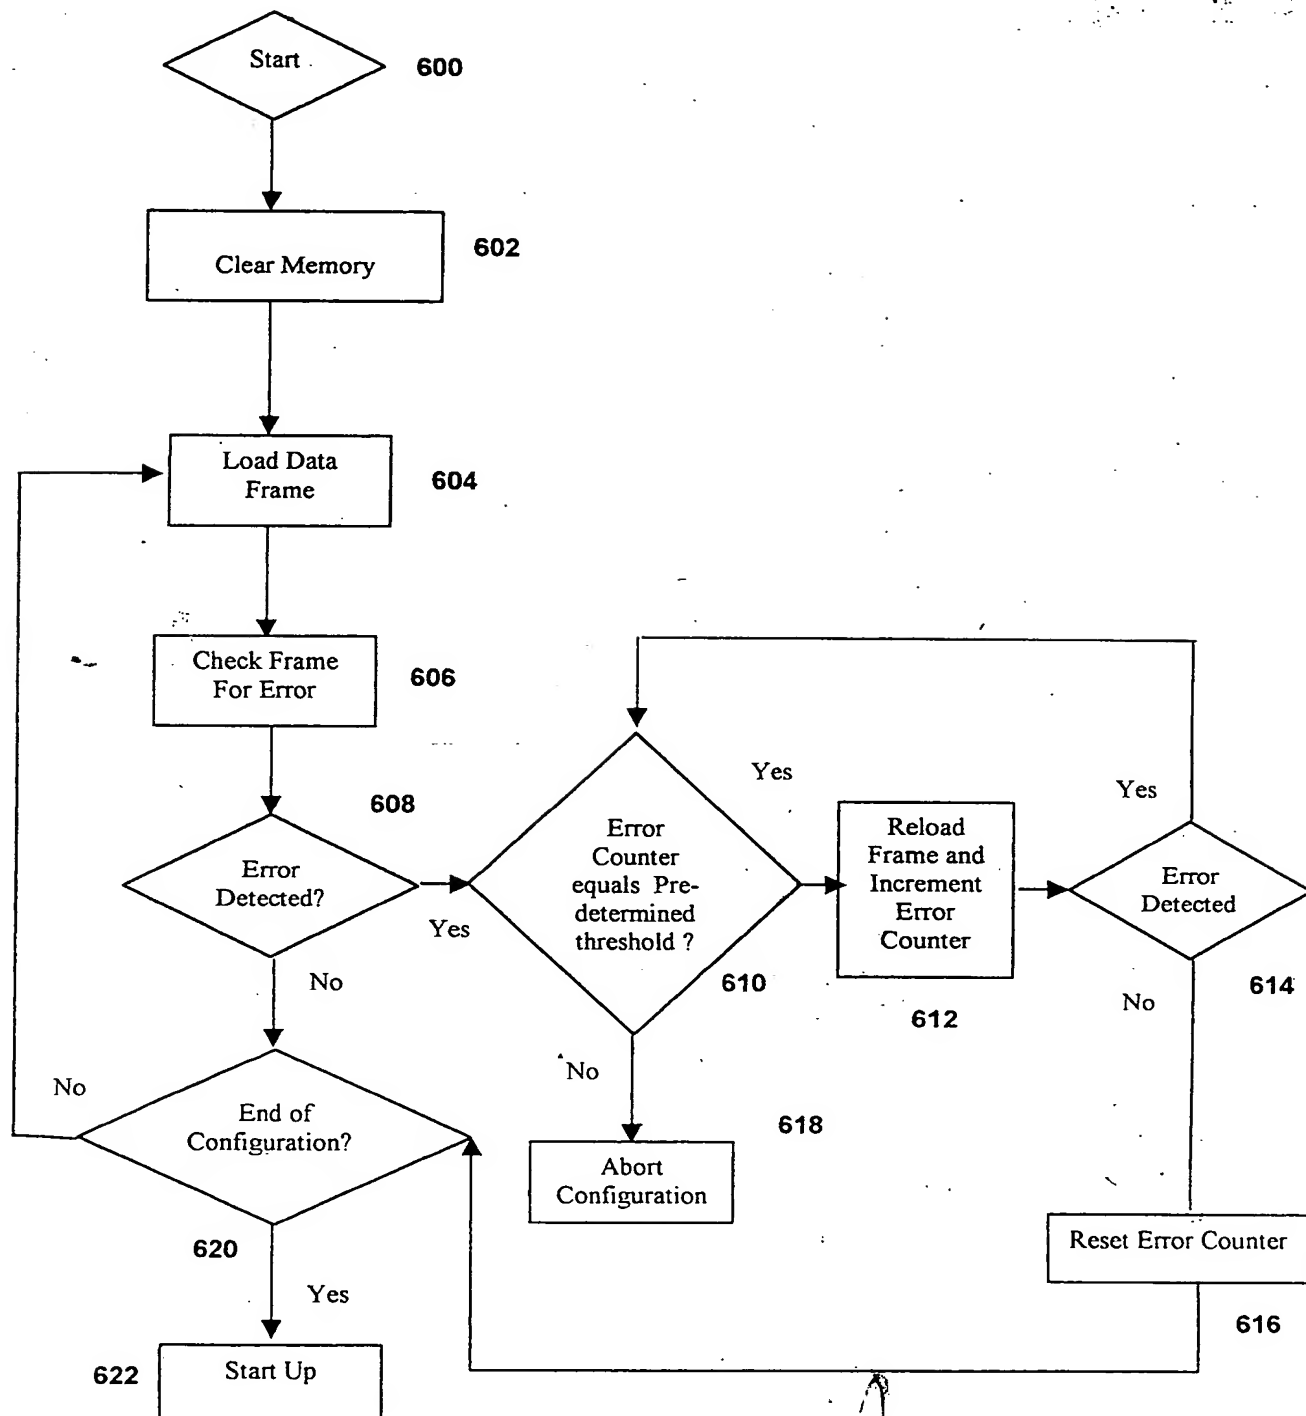


Figure 6  
Of Anand ~~And~~ Anand Advocates  
Attorney for the Applicant



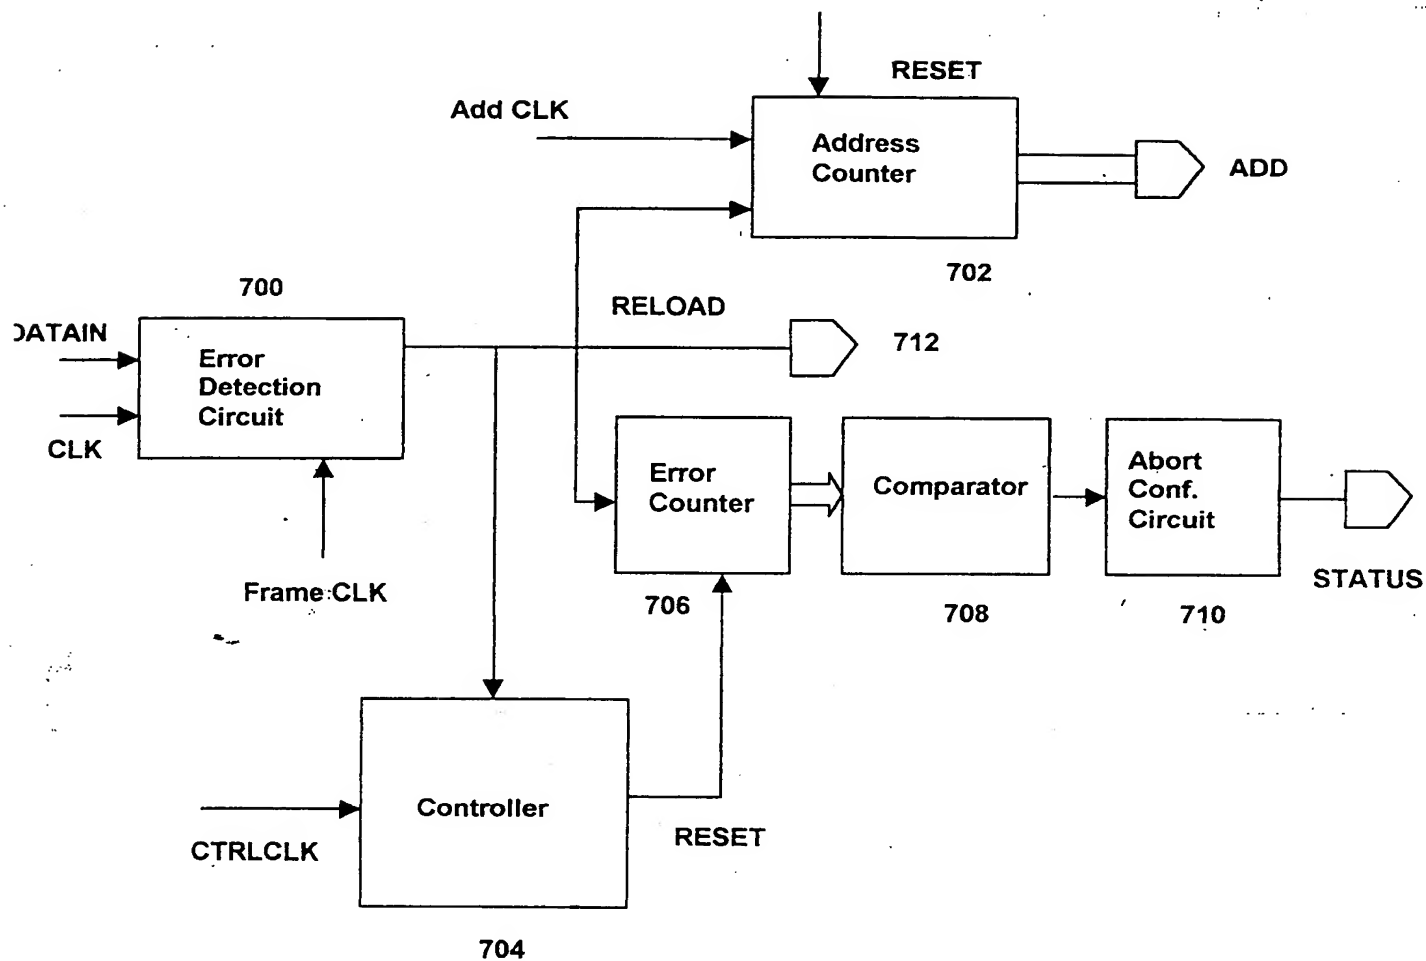


Figure 7

*Chauhan*

Of Anand And Anand Advocates  
Attorney for the Applicant

